

CROSSCALL CORE M4



A CONDENCED RESISTANCE


You always get straight to the point, and so does the CORE-M4. With its compact size and tested resistance, it has proved itself to be practical and reliable, even in the most difficult jobs. Perfect for meeting the expectations of both professionals and the general public.

Above all, its dimensions are its strength. No point of burdening yourself with a gigantic device, when you can benefit from a compact tool with useful functions.

While the CORE-M4 can satisfy professionals uses with its performance and design, it can also easily adapt to daily life for everyone, regardless of the demands.



COMPACT STRENGTH

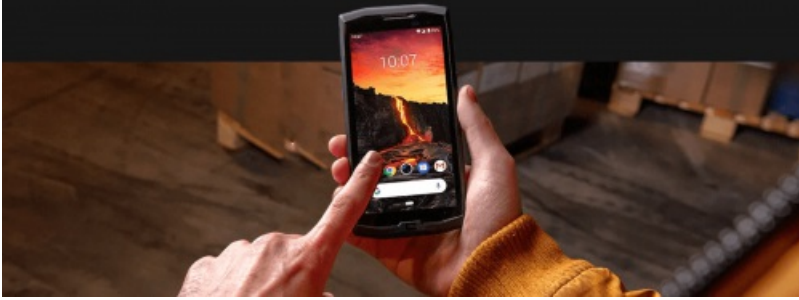

Its size is its strength. Its dimensions and screen format enable the CORE-M4 to fit into any pocket. Its handling is instant and enjoyable thanks to the various textures and curves of its design. Its minimal weight, enables you to tackle any situation easily and lightly.

READY TO LAST

No such thing as programmed obsolescence! In order to assist you for as long as possible, the CORE-M4 has been designed with tough components issued from the know-how of specialized and recognized companies, such as its Corning screen or its Qualcomm® processor. This, integrated into the extended life program, allows for guaranteeing both updates and the durability of its components.



Its ultra-compact format does not compromise its resistance. The CORE-M4 didn't hesitate to dive into chlorinated or salt water to own its IP68 certification and breezed through the 13 military standard tests.

TECHNICAL SPECIFICATIONS

Dimensions	150,6 x 72 x 12,7 mm
Weight	210 g
Color	Black
Operating system	Android™

Neosafe

209 Rue des Sources, 38920 Crolles

Tel : 04 76 72 26 77 | contact@neosafe.fr | <https://neosafe.fr>

SAS au Capital de 4 810 € - N° Siren RCS LYON 522 997 626 - N° TVA Intracommunautaire : FR42522997626

page 2 / 6

Version	9.0 PIE
Processor	QUAD-CORE 1,3 GHZ
Type	Qualcomm® 215
SAR Head/Body	0,72 W/kg – 1,32 W/kg
SAR Limbs	2,55 W/kg
Languages	Français, tchèque, danois, allemand, estonien, anglais, espagnol, croate, italien, lettonien, lituanien, hongrois, hollandais, norvégien, polonais, portugais, slovaque, slovène, finlandais, suédois, russe, arabe, chinois

OUTDOOR SPECIFICATIONS

IP rating	IP 68
Resistance to salt water	2m / 30mn
Resistance to dust	Totale
Operating temperature	-25°C / +50°C
Resistance	MIL STD 810G (13 tests) Drop test (6 faces de 2 m)

PHOTO

Sensor	12 MP
Autofocus	Oui
Front-facing camera	2 MP
Flash	LED
Flashlight	0,5W
Supported formats	JPEG

Neosafe

209 Rue des Sources, 38920 Crolles

Tel : 04 76 72 26 77 | contact@neosafe.fr | <https://neosafe.fr>

SAS au Capital de 4 810 € - N° Siren RCS LYON 522 997 626 - N° TVA Intracommunautaire : FR42522997626

page 3 / 6

VIDÉ=EO

Resolution	FHD 1080p @30fps
Supported formats	MPEG4, H.263, H. 264

SCREEN

Taille	4.95"
Type	IPS Corning Gorilla® Glass 3, Wet & Glove touch
Touch screen	Capacitive screen, 5 points
Resolution	18:9, 960x480 FWVGA
Brightness	380 cd/m2

BATTERY

Type	Li-Ion Polymère
Capacity	3000 mAh
Talk time (2G/3G)	17 h
Standby time (4G)	382 h
GPS time	7h

MEMORY

Flash	32 Go
RAM	2 Go
External (Micro SD)	jusqu'à 256 Go

Neosafe

209 Rue des Sources, 38920 Crolles

Tel : 04 76 72 26 77 | contact@neosafe.fr | <https://neosafe.fr>

SAS au Capital de 4 810 € - N° Siren RCS LYON 522 997 626 - N° TVA Intracommunautaire : FR42522997626

page 4 / 6

NETWORK & CONNECTIVITY

SIM	Dual SIM or SIM + SD tray
TYPE	Nano SIM
2G (GPRS/EDGE)	850/900/1800/1900 MHz
3G (HSPA+)	850/900/1900/2100 MHz
4G (LTE)	LTE : FDD-LTE band 1 (2100) / 3 (1800) / 5 (850) / 7 (2600) / 8 (900) / 20 (800) / 28 fullband (700) + 38
VoLTE	Compatible
VoWIFI	Compatible
WIFI	802.11 b/g/n/AC 2,4 + 5 GHz
Bluetooth®	4.2
ANT+	Yes
NFC	Yes, Payment function
USB	2.0 Type-C
OTG	Yes
X-LINK (Magconn technology)	Yes

CHARGER

Trademark	Crosscall
Model	KH0501000EW
Input AC frequency	100-240V AC
Input AC frequency	50/60Hz
Output voltage	5.0V DC

Neosafe

209 Rue des Sources, 38920 Crolles

Tel : 04 76 72 26 77 | contact@neosafe.fr | <https://neosafe.fr>

SAS au Capital de 4 810 € - N° Siren RCS LYON 522 997 626 - N° TVA Intracommunautaire : FR42522997626

page 5 / 6

Output current	1.0A
Output power	5.0W
Average active efficiency	73.82%
Efficiency at low load (10%)	-
No-load power consumption	0.084W